

Spinkit

For sectional doors up to 8.8 m² and up-and-over garage doors up to 9.8 m², belt drive

Two versions in kit:

- pre-assembled, 3x1 m sections guide SPIN10KCE;
- with pre-assembled 3 m guide SPIN11KCE.

Simplified programming via O-View: thanks to compatibility with the Opera system, the automation system can be managed, programmed and controlled even at a distance, with considerable savings in time.

Advanced: built-in radio card also compatible with Nice Flo and Smilo systems: possibility of memorising up to 100 transmitters! Input for photocells and possibility of connecting photo-test with self-learning function during installation.

Safe: obstacle detection system and automatic programming of the working times; motor absorption is monitored during movement, self-diagnosis by means of a flashing light and courtesy LED light.

Adjustable acceleration and deceleration at the start and end of each manoeuvre.

Can be connected with latest generation sensitive edges 8.2 KOhm.



The kit contains:

SN6011

1 Gear motor SN6011 with incorporated control unit and plug-in receiver.




FLO2RE

1 Transmitter 433.92 MHz, 2 channels.



SPIN10KCE

1 Guide in three 1-metre sections.



3 x 1 m

SPIN11KCE

1 Guide in one 3-metre section.



1 x 3 m

COMMON ACCESSORIES



IBT4N
Interface for connecting the O-View programming unit.

Pc./Pack 1



IT4WIFI
Smart Wi-fi interface to manage gates and garage doors by smartphone.

Pc./Pack 1



SNA1
Spare control unit for SPIN10KCE and SPIN11KCE.

Pc./Pack 1



SPA2
Kit for unlocking from the outside with cable.

Pc./Pack 1



SPA5
Oscillating arm sliding on bearings with optimised structure for projecting up-and-over doors.

Pc./Pack 1



SPA6
Large 585 mm long connecting arm.

Pc./Pack 1



SPA7
Kit of two additional fixing brackets.

Pc./Pack 2



SNA16
Quick-connect brackets for ceiling mounting.

Pc./Pack 10



TS
Signboard.

Pc./Pack 1

TECHNICAL SPECIFICATIONS

Code	Description
SPIN10KCE	Kit for automating sectional and up-and-over doors. Guide in three 1-metre sections
SPIN11KCE	Kit for automating sectional and up-and-over doors. Pre-mounted guide of 3 m

N.B. The content of the package may vary: consult the retailer.


Code	SN6011
ELECTRICAL DATA	
Power supply (Vac 50/60 Hz)	230
Absorption (A)	0,7
Power (W)	200
PERFORMANCE DATA	
Speed (m/s)	0,14
Force (N)	550
Working cycle (cycles/day)	30
DIMENSIONAL AND GENERAL DATA	
Protection level (IP)	40
Working temp. (°C Min/Max)	-20 ÷ +55
Dimensions (mm)	225x330x100 h
Weight (kg)	3,3

UTILISATION LIMITS

Using the maximum travel

	Non-projecting up-and-over door		Projecting up-and-over door		Sectional	
	H	L	H	L	H	L
SPIN10KCE	2,2 m	3,5 m	2,8 m	3,5 m	2,4 m	3,7 m
SPIN11KCE	2,2 m	3,5 m	2,8 m	3,5 m	2,4 m	3,7 m

DIMENSIONS

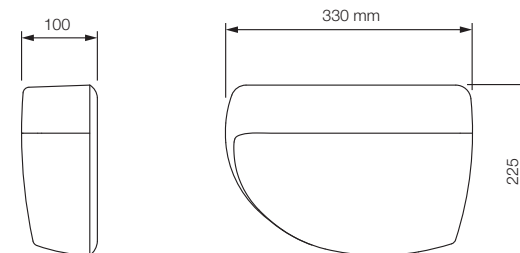

For swing gates

For sliding gates

Barrier gate operator systems

For garage and industrial doors

Control systems and accessories

Compatibility table and alphabetical index